

# AX1500 Wireless Dual-Band Gigabit Router

Model: MR60X

**EasyMesh**  
Compatible

## Highlights


- 1.5 Gbps Wi-Fi 6 Speed - 1201 Mbps + 300 Mbps Dual-Band Speed<sup>†</sup>
- 4× More Capacity - Connect more Wi-Fi devices with OFDMA and MU-MIMO<sup>†</sup>
- Broader Wi-Fi Coverage - Four powerful high-gain antennas with Beamforming
- Gigabit Wired Connections - Full Gigabit Ports for PCs, IPTVs, and Game Consoles

## Easy App Control


The MERCUSYS app helps you set up in minutes and manage your Wi-Fi at home or away through your iOS or Android devices.



## Applications

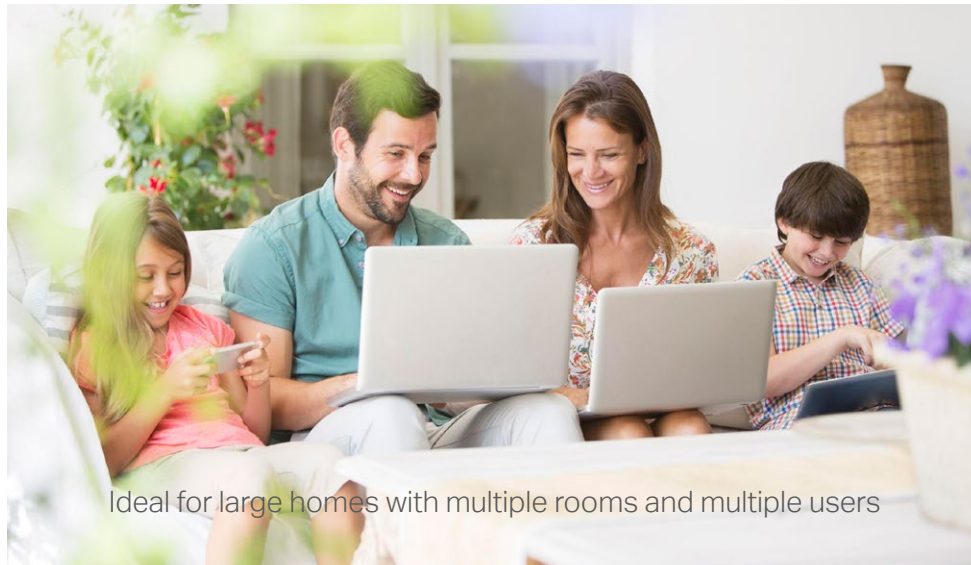

Ideal for large homes with multiple rooms and multiple users

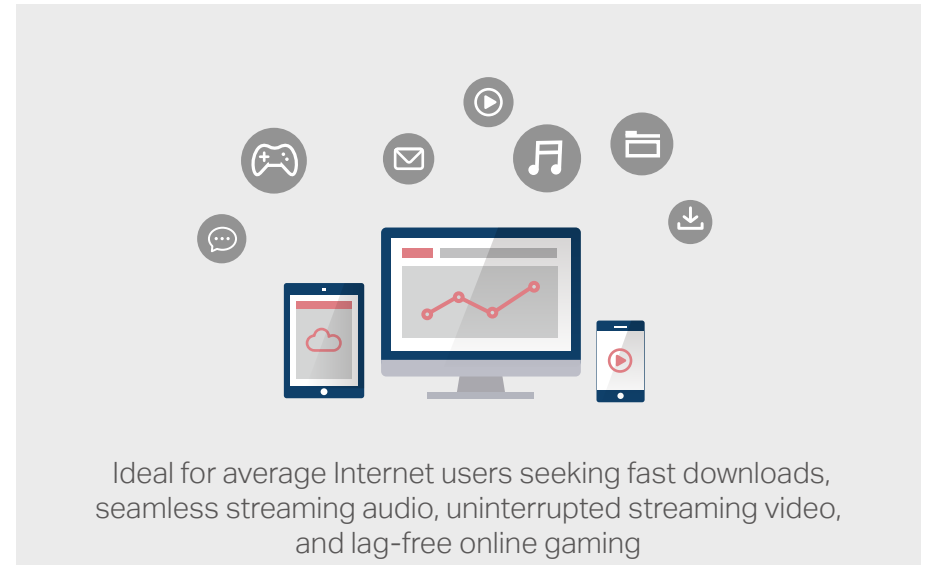

Ideal for average Internet users seeking fast downloads, seamless streaming audio, uninterrupted streaming video, and lag-free online gaming

## Features



**Parental Controls**  
Establish appropriate policies to protect children with responsible, safe internet access



**Guest Network**  
Provides a separate network for guests to ensure your security and privacy



**Quality of Service**  
Prioritizes devices you select to perform better



**Smart Connect**  
Intelligently chooses the best available band for each device




**IPTV Supported**  
Supports IGMP Proxy/Snooping, Bridge, and Tag VLAN to optimize IPTV streaming





**IPv6 Supported**  
Allows you to enjoy IPv6 services provided by your ISP and visit IPv6 websites


## Crank Up Your Wi-Fi to 6

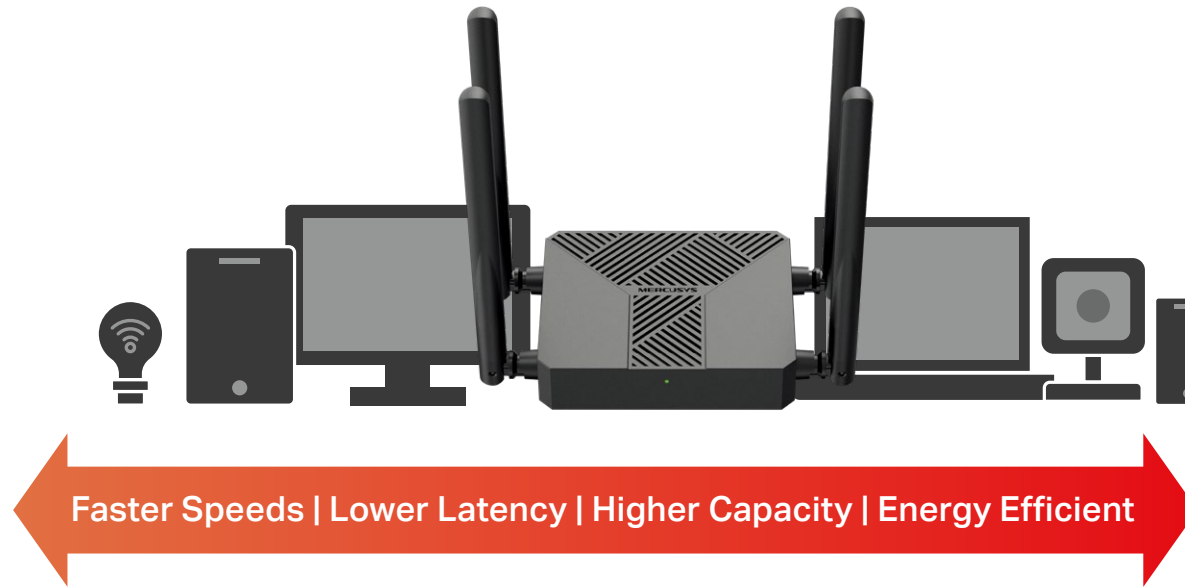The latest Wi-Fi 6 standard applies advanced technology designed to deliver more simultaneous connections, extend Wi-Fi range, and maintain reliably fast data transmissions, satisfying demands for high-performance wireless experiences.



 1.5 Gbps Wi-Fi Speeds†


 Connect 4× More Devices‡

 Minimize Buffering and Lag

 Eco-Friendly Power Saving‡

## EasyMesh-Compatible

MR60X is compatible with EasyMesh for a smooth whole home mesh Wi-Fi network, preventing drops and lag when switching signals. Enjoy uninterrupted streaming while roaming your house.\*

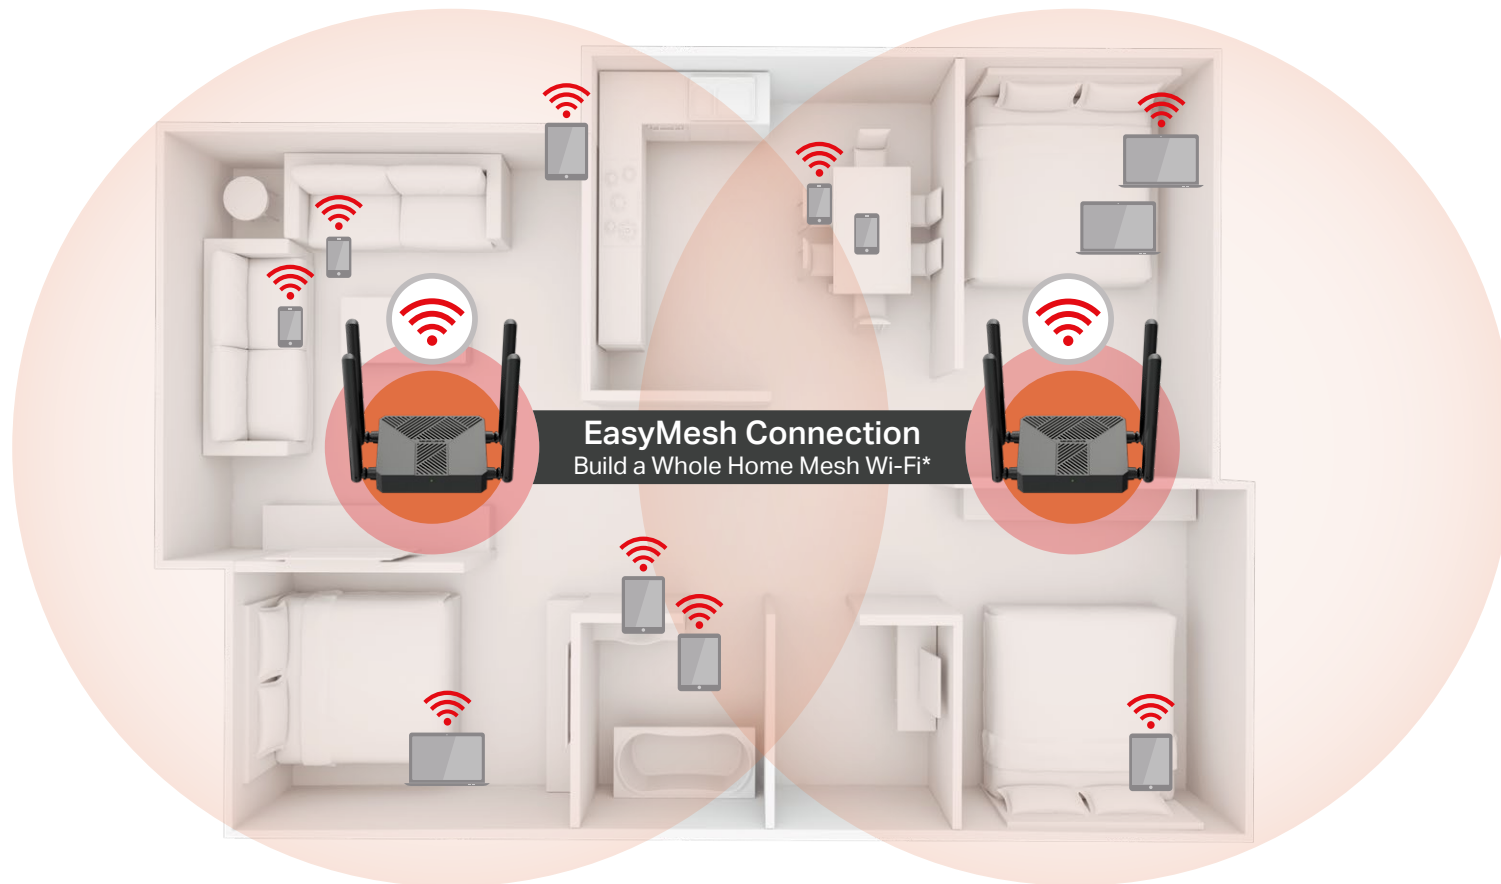

## Specifications

### Hardware

#### Ports

1× Gigabit WAN Port + 2 × Gigabit LAN Ports

#### Button

Reset/WPS Button


#### Dimensions (W x D x H)

5.2 × 3.7 × 1.2 in

(132.14 × 94.81 × 30.5 mm)

#### Antennas

4× High-Gain Antennas

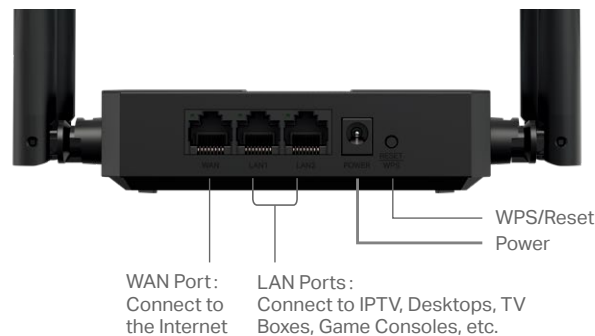

### Wireless

#### Wireless

1201 Mbps (5 GHz) + 300 Mbps (2.4 GHz), compatible with 11ax/ac/a/b/g/n Wi-Fi standards

- OFDMA: Allows simultaneous data transmission to and from several devices sharing one band, satisfying high network capacity demands<sup>†</sup>
- MU-MIMO: Transfers data to more devices simultaneously, improving overall network efficiency<sup>†</sup>
- 1024-QAM: Packs more effective data at once to achieve a 1.25× speed increase over 802.11ac 256-QAM<sup>†</sup>
- Long OFDM Symbol: Delivers 4× more data subcarriers to increase range, stability, and speed<sup>†</sup>
- Target Wake Time (TWT): Reduces power consumption for your mobile and IoT devices during data transmissions<sup>†</sup>
- BSS Color: Minimizes interference from neighboring signals to improve transmission efficiency<sup>†</sup>

#### EIRP

2.4 GHz < 20dBm (EIRP)

5 GHz < 23dBm (EIRP)

#### Reception Sensitivity

11g 6Mbps: -96dBm

11g 54Mbps: -78dBm

11n HT40 MCS7:-74dBm

11n HT20 MCS7:-77dBm

11a 6Mbps:-94dBm

11a 54Mbps:-76dBm

11ac VHT20 MCS8:-71dBm

11ac VHT40 MCS8:-68dBm

11ac VHT80 MCS8:-65dBm

#### Wireless Function

Enable/Disable Wireless Radio, WMM

#### Security Features

- Guest Network Access
- Firewall Protection
- Wireless Security: W WPA-PSK / WPA2-PSK / WPA3 wireless encryption

## Specifications

### Software

---

#### WAN Type

Dynamic IP/Static IP/PPPoE/L2TP/PPTP

#### DHCP

Server, DHCP Client List

#### NAT Forwarding

Port Forwarding, Port Triggering, UPnP, DMZ

#### Management

Access Control

Local Management

Remote Management

#### Firewall Security

SPI Firewall, IP and MAC Address Binding

#### Guest Network

2.4 GHz Guest Network, 5 GHz Guest Network

### Others

---

#### Package Contents

- AX1500 Wireless Dual-Band Gigabit Router MR60X
- Power Adapter
- Quick Installation Guide
- RJ45 Ethernet Cable

#### Environment

- Operating Temperature: 0°C~40°C (32°F~104°F)
- Operating Humidity: 10%~90% Non-Condensing
- Storage Humidity: 5%~90% Non-Condensing

Specifications are subject to change without notice. Copyright © 2024 MERCUSYS. All rights reserved.

<sup>†</sup>Maximum wireless signal rates are the physical rates derived from IEEE Standard 802.11 specifications. Actual wireless data throughput, wireless coverage, and number of connected devices are not guaranteed and will vary as a result of network conditions, client limitations, and environmental factors, including building materials, obstacles, volume and density of traffic, and client location.

<sup>‡</sup>Use of 802.11ax (Wi-Fi 6), and features including OFDMA, MU-MIMO, 1024-QAM, BSS Color, and Target Wake Time(TWT) requires clients to also support the corresponding features. Actual power reduction by Target Wake Time may vary as a result of network conditions, client limitations, and environmental factors. This router may not support all the mandatory features as ratified in Draft 3.0 of IEEE 802.11AX specifications. Further software upgrades for feature availability may be required.

<sup>§</sup>The 802.11ax white paper defines standardized modifications to both the IEEE 802.11 physical layers (PHY) and the IEEE 802.11 Medium Access Control (MAC) layer as enabling at least one mode of operation capable of supporting improvement of at least four times the average throughput per station (measured at the MAC data service access point) in a dense deployment scenario.

<sup>¶</sup>Use of WPA3 requires clients to also support WPA3.

<sup>\*</sup>EasyMesh-compatible products can network with other devices that use EasyMesh. Failed connections may be due to firmware conflicts of different vendors. The EasyMesh-compatible function is still being developed on some models and will be supported in subsequent software updates. This product is compatible with standardized EasyMesh technology but has not obtained the Wi-Fi EasyMesh™ certification. Actual network speed may be limited by the rate of the product's Ethernet WAN or LAN port, the rate supported by the network cable, internet service provider factors, and other environmental conditions.