

FD514GS3-R880

4GE+2WIFI6(AX3000) XPON ONU



High Speed CPU



Low Power Consumption



Software Customization




Optional Shell Supply

Brief Views

FD514GS3-R880 is WiFi6 xPON Gateway ONU, it support 802.11a/b/g/n/ac/ax standards over 2.4GHz and 5GHz, max speed can up to 3000Mbps.

FD514GS3-R880 have a high reliability and provide quality of service guarantee, easy management, flexible expansion and networking. It fully meets the ITU-T and IEEE technical standards and have good compatibility with third party OLT.

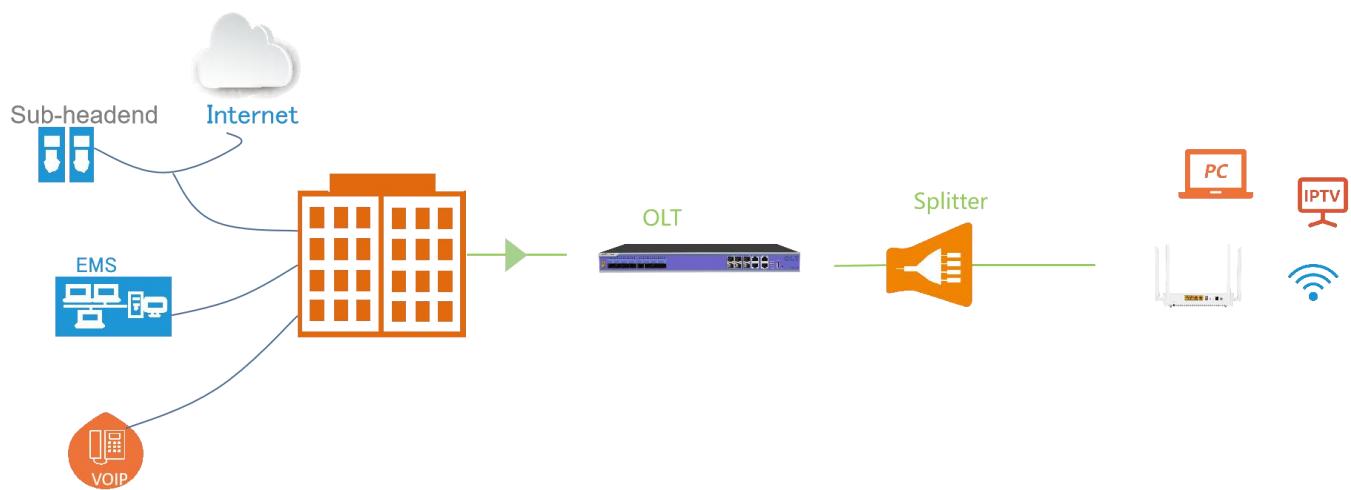

Functional Feature

- In compliant with IEEE802.3ah and ITU - T G.984 standard
- Support ONU auto-discovery/Link detection/remote upgrade of software
- Support SN and LOID+Password multiple registration methods
- Support port VLAN configuration
- Support port-based rate limitation and bandwidth control
- Support MAC address learning
- Support MAC address learning account limit
- Support VLAN transparent/tag/translate/trunk
- Support broadcasting storm resistance function
- Support igmp transparent/snooping/proxy mode
- Support Dynamic Bandwidth Allocation (DBA)
- Support AES encryption and decryption
- EMS network management based on SNMP ,convenient for maintenance
- Support power-off alarm function ,easy for link problem detection
- Support Firewall
- Support MAC address/URL filter
- Support Remote WEB/Telnet access control

Product Interface and LED



LED Definitions

Indicator		Description
PWR	Power status	On: The ONT is power on; Off: The ONT is Power off;
PON	ONT Register	On: Success to register to OLT; Blinking: In process of registering to OLT; Off:Failed to register to OLT or no normal optical signal input;
LOS	PON optical signals	On: Optical power lower than receiver sensitivity; Off: Optical in normal;
LAN1-4	LAN port status	On: Ethernet connection is normal; Blinking: Data is being transmitted through the Ethernet port; Off: Ethernet connection is not set up;
INT	Internet status indicator	On: The routed WAN Internet access service is normal. Off: The routed WAN Internet access service is abnormal.
WIFI	WIFI	Blinking:Data is being transmitted On:WIFI function Opens

Product Specification

Mechanics	
Dimensions	210mm*135mm*45mm
Weight	About 228g

Hardware													
User Port (LAN)	RJ-45 connector 4* 10/100/1000Mbps adaptive Ethernet port Full/half duplex Auto MDI/MDI-X												
Indicators	PWR / PON / LOS / LAN1-4 / INT / WIFI												
PON Port	<table border="1"> <tr> <td>PON Mode</td><td>EPON: 1000BASE-PX20+ symmetric GPON: FSAN G.984.2 standard,Class B+</td></tr> <tr> <td>PON Rate</td><td>EPON: 1.25Gbps downstream/upstream GPON: 2.488Gbps/1.244Gbps downstream/upstream</td></tr> <tr> <td>Wavelength</td><td>Transmit: 1310nm Receiver: 1490nm</td></tr> <tr> <td>Receiving sensitivity</td><td>EPON: -27dBm GPON: -28dBm</td></tr> <tr> <td>Saturated power</td><td>EPON: -3dBm GPON: -8dBm</td></tr> <tr> <td>Transmitting power</td><td>EPON:0~4dBm GPON: 0.5~5dBm</td></tr> </table>	PON Mode	EPON: 1000BASE-PX20+ symmetric GPON: FSAN G.984.2 standard,Class B+	PON Rate	EPON: 1.25Gbps downstream/upstream GPON: 2.488Gbps/1.244Gbps downstream/upstream	Wavelength	Transmit: 1310nm Receiver: 1490nm	Receiving sensitivity	EPON: -27dBm GPON: -28dBm	Saturated power	EPON: -3dBm GPON: -8dBm	Transmitting power	EPON:0~4dBm GPON: 0.5~5dBm
PON Mode	EPON: 1000BASE-PX20+ symmetric GPON: FSAN G.984.2 standard,Class B+												
PON Rate	EPON: 1.25Gbps downstream/upstream GPON: 2.488Gbps/1.244Gbps downstream/upstream												
Wavelength	Transmit: 1310nm Receiver: 1490nm												
Receiving sensitivity	EPON: -27dBm GPON: -28dBm												
Saturated power	EPON: -3dBm GPON: -8dBm												
Transmitting power	EPON:0~4dBm GPON: 0.5~5dBm												

WIFI



IEEE802.11b/g/n/ax(2.4G) / IEEE802.11a/n/ac/ax(5G)

2.4G: 40Mhz bandwidth maximum rate 574Mbps

5G: 160Mhz bandwidth maximum rate 2402Mbps

Total wireless rate is 3000Mbps

2.4G EIRP:22dBm / 5 G EIRP:21dBm

Environment

Working temperature	0 to 40° C
Operating humidity	10% ~ 90% (Non-condensing)

Power

External 12VDC/1.5A power supply adapter

Power consumption <18W

Copyright © Shenzhen C-Data Technology Co., Ltd. 2023. All rights reserved.

Without the prior written consent of C-DATA, any reproduction, excerpting, backup, modification, translation or any other form of commercial use of this document or any portion of this document, and in any form or by any means, to transmit the document are prohibited.

